



**SVB Spezialversand für Yacht- & Bootszubehör**  
Gelsenkirchener Str. 25-27 · 28199 Bremen, Germany  
Tel. (0421) 57290-0 · Fax: (0421) 57290-40  
email: info@svb24.com · [www.svb24.com](http://www.svb24.com)

**SVB®**  
1989  
Specialist for yacht and boat equipment

## Cables & Cable lugs



### *Making & pressing cables*

SVB offers you the service of professional cable making and pressing. The pressing is done with a specialty tool and guarantees an optimal connection. The pressing is sealed with a shrink wrap.



**Please fill out the following data sheet and send it back to us.**

Well advised via telephone: our experienced team is there for you in case you have any questions.

# DATA SHEET

## Cable pressing

Name:
Street:
City:
Tel.:
E-Mail:
Fax:

Comment:
Date:
Signature:

### Cabling data

Single core wires H07VK after DIN 72551. Temperature range -40°C to 105°C. Isolation out of sea water resistant PVC, colors red or black. Suitable for the installation in lighting, signaling devices, motors, pumps, etc.

Please select the desired cabling type in the following table. The article number then has to be written in your data sheet.



### Cable

Einadrige Installations- & Fahrzeugleitung

Einadrige Installations- & Fahrzeugleitung, verzinkt\*

Item No.:	Cable-Ø:	Color:	€
16386	1 x 10 mm <sup>2</sup>	red	2,40
16387	1 x 10 mm <sup>2</sup>	black	2,45
16389	1 x 16 mm <sup>2</sup>	red	3,95
16388	1 x 16 mm <sup>2</sup>	black	3,95
52650	1 x 25 mm <sup>2</sup>	red	6,95
52643	1 x 25 mm <sup>2</sup>	black	6,95
52647	1 x 35 mm <sup>2</sup>	red	7,95
52640	1 x 35 mm <sup>2</sup>	black	7,95
52648	1 x 50 mm <sup>2</sup>	red	11,95
52641	1 x 50 mm <sup>2</sup>	black	11,95
52654	1 x 70 mm <sup>2</sup>	red	15,95
52651	1 x 70 mm <sup>2</sup>	sblack	15,95
52642*	1 x 95 mm <sup>2</sup>	black	18,95

Item No.:	Cable-Ø:	Color:	€
16475	1 x 1,5 mm <sup>2</sup>	sblack	0,80
16476	1 x 1,5 mm <sup>2</sup>	red	0,80
16477	1 x 2,5 mm <sup>2</sup>	black	0,95
16478	1 x 2,5 mm <sup>2</sup>	red	0,95
16479	1 x 4,0 mm <sup>2</sup>	black	1,50
16480	1 x 4,0 mm <sup>2</sup>	red	1,50
16481	1 x 6,0 mm <sup>2</sup>	black	2,30
16482	1 x 6,0 mm <sup>2</sup>	red	2,30
16483	1 x 10 mm <sup>2</sup>	black	2,95
16484	1 x 10 mm <sup>2</sup>	red	2,95
16485	1 x 16 mm <sup>2</sup>	black	4,50
16486	1 x 16 mm <sup>2</sup>	red	4,50
16487	1 x 25 mm <sup>2</sup>	black	7,95
16488	1 x 25 mm <sup>2</sup>	red	7,95
16489	1 x 35 mm <sup>2</sup>	black	8,95
16490	1 x 35 mm <sup>2</sup>	red	8,95
16491	1 x 50 mm <sup>2</sup>	black	12,95
16492	1 x 50 mm <sup>2</sup>	red	12,95

\*only available in black. Marking through red shrink wrap possible.

\*Temperature resistant and halogen-free single core, CU-braid tinned. Suitable for the inner cabling of lighting, heating devices, electrical devices, switchgears and other distributors in devices, machines and facilities for the installation in pipes, in and under plaster,

in enclosed installation channels as well as for traffic systems or the exterior. Advantages: temperature resistant, halogen-free, very good abrasion and carving properties, resistant against UV and ozon, very weather resistant.

# DATA SHEET

## Cable pressing

### Cable pressing

Out of the following table, please select what pressing you need for the ends of the cable. The article number is to be written into the order form on the following page.



### Cable lug


Cable lug	Cable-Ø:	für Bolzenstärke:	€
Item No.: 51928	10 mm <sup>2</sup>	M 5	1,00
Item No.: 51890	10 mm <sup>2</sup>	M 6	2,00
Item No.: 15936	10 mm <sup>2</sup>	M 8	2,00
Item No.: 51932	16 mm <sup>2</sup>	M 5	1,00
Item No.: 51891	16 mm <sup>2</sup>	M 6	2,30
Item No.: 15937	16 mm <sup>2</sup>	M 8	2,35
Item No.: 15939	16 mm <sup>2</sup>	M 10	2,35
Item No.: 51933	25 mm <sup>2</sup>	M 5	1,50
Item No.: 51899	25 mm <sup>2</sup>	M 6	2,30
Item No.: 15940	25 mm <sup>2</sup>	M 8	2,55
Item No.: 15941	25 mm <sup>2</sup>	M 10	2,55
Item No.: 51892	35 mm <sup>2</sup>	M 6	2,80
Item No.: 15942	35 mm <sup>2</sup>	M 8	2,85
Item No.: 15943	35 mm <sup>2</sup>	M 10	2,85
Item No.: 51893	50 mm <sup>2</sup>	M 6	4,95
Item No.: 15944	50 mm <sup>2</sup>	M 8	4,95
Item No.: 15945	50 mm <sup>2</sup>	M 10	4,95
Item No.: 51934	70 mm <sup>2</sup>	M 6	3,95
Item No.: 51913	70 mm <sup>2</sup>	M 8	7,95
Item No.: 15946	70 mm <sup>2</sup>	M 10	7,95
Item No.: 15947	70 mm <sup>2</sup>	M 12	7,95
Item No.: 51894	95 mm <sup>2</sup>	M 8	9,95
Item No.: 15948	95 mm <sup>2</sup>	M 10	9,95
Item No.: 15949	95 mm <sup>2</sup>	M 12	9,95

Die **Servicegebühr** für Kabelverpressungen beträgt für Kabeldurchmesser von **10 - 35 mm<sup>2</sup>** **3,95 €** und für Kabeldurchmesser von **50 - 95 mm<sup>2</sup>** **4,95 €**.

*Other cabling or connections including lugs are available on request.*

#### For cabling from 50 mm<sup>2</sup>:

if the cable has less than 20 cm length, the position (angle) of the pressed ends has to be declared (following table).

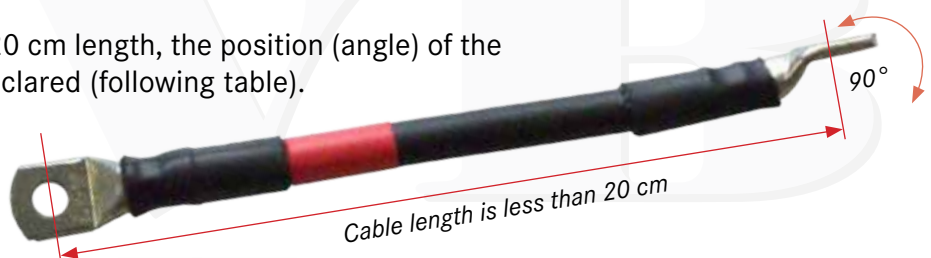

# DATA SHEET

## Order



1989  
Specialist for yacht and boat equipment

### Order

Please fill out the following form with the desired cabling diameter (or the article number), the cable color, cable length and the desired pressing as well as the amount. For cabling from 50 mm<sup>2</sup> with a length less than 20 cm, the position (angle) of the pressed ends has to be declared (following table)..

### Example:

Cable-Ø mm <sup>2</sup>	Color	Length	Pressing 1	Pressing 2	Angle	Pice
25 mm <sup>2</sup>	red	1,5 m	Bolzenstärke M8	Bolzenstärke M8		1
70 mm <sup>2</sup>	red	0,15 m	Bolzenstärke M10	Bolzenstärke M12	30°	2
Item No.: 16387	black	3,75 m	Item No.: 51890	Item No.: 15936		1

### Cable data:

Cable-Ø mm <sup>2</sup>	Color	Length	Pressing 1	Pressing 2	Angle	Pice