

# DATA SHEET

## Cable pressing

**SVB Spezialversand GmbH**  
 Gelsenkirchener Str. 25-27 · D - 28199 Bremen  
 +49 (0)421 57290510 · e-mail: info@svb24.com  
 www.svb24.com



Name:
Street:
City:
Tel.:
E-Mail:
Fax:

Comment:
Date:
Signature:

### Cabling data

Single core wires H07VK after DIN 72551.  
 Temperature range -40°C to 105°C. Isolation out of sea water resistant PVC, colors red or black. Suitable for the installation in lighting, signaling devices, motors, pumps, etc..



Please select the desired cabling type in the following table.  
 The article number then has to be written in your data sheet.

### Cable

Flexible Control Cables, Single Core

Item No.	Cable-Ø	Color	€
16386	1 x 10 mm <sup>2</sup>	red	2,80
16387	1 x 10 mm <sup>2</sup>	black	2,80
16389	1 x 16 mm <sup>2</sup>	red	4,95
16388	1 x 16 mm <sup>2</sup>	black	4,95
52650	1 x 25 mm <sup>2</sup>	red	9,95
52643	1 x 25 mm <sup>2</sup>	black	9,95
52647	1 x 35 mm <sup>2</sup>	red	11,95
52640	1 x 35 mm <sup>2</sup>	black	11,95
52648	1 x 50 mm <sup>2</sup>	red	14,95
52641	1 x 50 mm <sup>2</sup>	black	14,95
52654	1 x 70 mm <sup>2</sup>	red	22,95
52651	1 x 70 mm <sup>2</sup>	black	20,95
52686	1 x 95 mm <sup>2</sup>	red	28,95
52642	1 x 95 mm <sup>2</sup>	black	28,95

### Cable

Single Core Wires, tinned\*

Item No.	Cable-Ø	Color	€
16475	1 x 1,5 mm <sup>2</sup>	black	1,20
16476	1 x 1,5 mm <sup>2</sup>	red	1,20
16477	1 x 2,5 mm <sup>2</sup>	black	2,20
16478	1 x 2,5 mm <sup>2</sup>	red	2,20
16479	1 x 4,0 mm <sup>2</sup>	black	2,50
16480	1 x 4,0 mm <sup>2</sup>	red	2,50
16481	1 x 6,0 mm <sup>2</sup>	black	3,30
16482	1 x 6,0 mm <sup>2</sup>	red	3,30
16483	1 x 10 mm <sup>2</sup>	black	5,50
16484	1 x 10 mm <sup>2</sup>	red	5,50
16485	1 x 16 mm <sup>2</sup>	black	7,50
16486	1 x 16 mm <sup>2</sup>	red	7,50
16487	1 x 25 mm <sup>2</sup>	black	12,95
16488	1 x 25 mm <sup>2</sup>	red	12,95
16489	1 x 35 mm <sup>2</sup>	black	16,95
16490	1 x 35 mm <sup>2</sup>	red	16,95
16491	1 x 50 mm <sup>2</sup>	black	22,95
16492	1 x 50 mm <sup>2</sup>	red	20,95

\*Temperature resistant and halogen-free single core, CU-braid tinned. Suitable for the inner cabling of lighting, heating devices, electrical devices, switchgears and other distributors in devices, machines and facilities for the installation in pipes, in and under plaster, in enclosed installation channels as well as


for traffic systems or the exterior.  
 Advantages: temperature resistant, halogen-free, very good abrasion and carving properties, resistant against UV and ozone, very weather resistant.

### Cable pressing

Out of the following table, please select what pressing you need for the ends of the cable. The article number is to be written into the order form on the following page.

### Cable lug

Cable lug Item No.	Cable-Ø	for Bolt	€
51928	10 mm <sup>2</sup>	M 5	1,40
51890	10 mm <sup>2</sup>	M 6	1,80
15936	10 mm <sup>2</sup>	M 8	2,20
15938	10 mm <sup>2</sup>	M 10	2,60
51932	16 mm <sup>2</sup>	M 5	1,60
51891	16 mm <sup>2</sup>	M 6	2,00
15937	16 mm <sup>2</sup>	M 8	2,40
15939	16 mm <sup>2</sup>	M 10	2,80
51933	25 mm <sup>2</sup>	M 5	2,00
51899	25 mm <sup>2</sup>	M 6	2,40
15940	25 mm <sup>2</sup>	M 8	2,80
15941	25 mm <sup>2</sup>	M 10	3,20
51892	35 mm <sup>2</sup>	M 6	2,40
15942	35 mm <sup>2</sup>	M 8	2,80
15943	35 mm <sup>2</sup>	M 10	3,20
51893	50 mm <sup>2</sup>	M 6	4,50
15944	50 mm <sup>2</sup>	M 8	4,80
15945	50 mm <sup>2</sup>	M 10	4,95
51934	70 mm <sup>2</sup>	M 6	5,10
51913	70 mm <sup>2</sup>	M 8	8,50
15946	70 mm <sup>2</sup>	M 10	8,90
15947	70 mm <sup>2</sup>	M 12	9,30
51894	95 mm <sup>2</sup>	M 8	9,95
15948	95 mm <sup>2</sup>	M 10	11,95

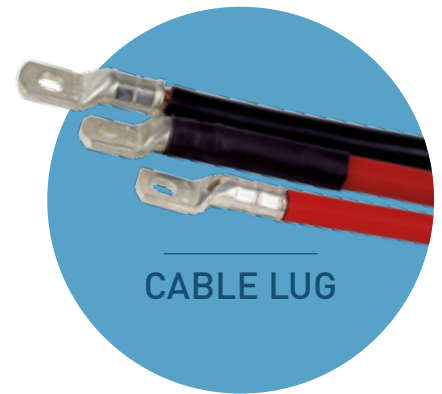


The **service fee** for cable crimping is  
**€ 4.95 for cable diameters from 10 - 35 mm<sup>2</sup>** and for  
**cable diameters from 50 - 95 mm<sup>2</sup> € 5.95**

*Other cabling or connections including lugs are available on request.*

### For cabling from 50 mm<sup>2</sup>:

if the cable has less than 20 cm length, the position (angle) of the pressed ends has to be declared (following table).

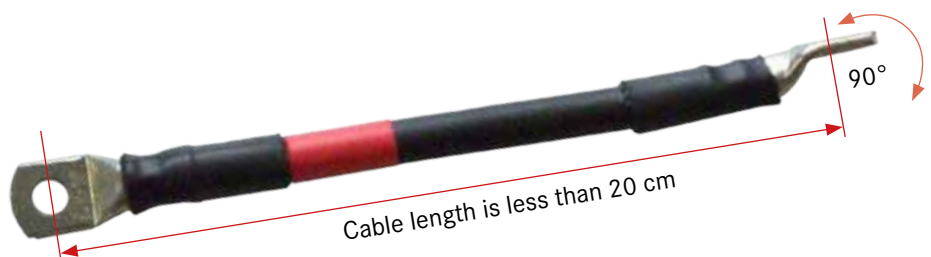



### Order

Please fill out the following form with the desired cabling diameter (or the article number), the cable color, cable length and the desired pressing as well as the amount. For cabling from 50 mm<sup>2</sup> with a length less than 20 cm, the position (angle) of the pressed ends has to be declared (following table)..

### Example:

Cable-Ø mm <sup>2</sup>	Color	Length	Pressing 1	Pressing 2	Angle	Pice
25 mm <sup>2</sup>	red	1,5 m	for Bolt M8	for Bolt M8		1
70 mm <sup>2</sup>	red	0,15 m	for Bolt M10	for Bolt M12	30°	2
Item No. 16387	black	3,75 m	Item No. 51890	Item No. 15936		1

### Cable data:

Cable-Ø mm <sup>2</sup>	Color	Length	Pressing 1	Pressing 2	Angle	Pice