

AIS SART

PLOMO-500



► The Latest SART Technology

AMEC AIS SART PLOMO-500 complies with IEC 61097-14 specification. It is designed to be an alternative of Radar SART. AMEC PLOMO-500 can transmit GPS positions, Unique ID, COG and SOG in every minute once activated. It allows the rescue team to locate the survivors rapidly through the broadcasted AIS information and, ultimately, gives the lives a better chance to survive.

► User-Friendly Operation

AMEC PLOMO-500 is not just only the AIS SART itself but also a complete survival/distress solution of all other essential accessories of AIS SART. The solution comes in a survival bag and during emergency times, it is all what user needs to carry on his/her back. The setting operation is easy; it only requires 4 simple steps.

► Backlit Panel and LED Indicator Integration

AMEC PLOMO-500 has a backlit operational panel which allows users to see the buttons in dusky environment. Moreover, main unit has an over usage design to indicate if the battery life has been compromised due to excessive testing or it had been activated previously. Also, to increase the chance of survival, unit's LED indicator signals "SOS" distress message during activation for the survivors to be easily spotted by the rescue team.


FEATURES

- Innovative AIS Technology
- Rugged and compact design
- Buoyant / floatable and waterproof to 10m
- Florescent backlight panel
- SOS LED light
- Easy to assemble and carry
- Minimum operating life - 96 hours


APPLICATIONS

- Leisure Boat
- Fishing Boat
- AIS Transponder
- AIS Receiver

DIMENSIONS

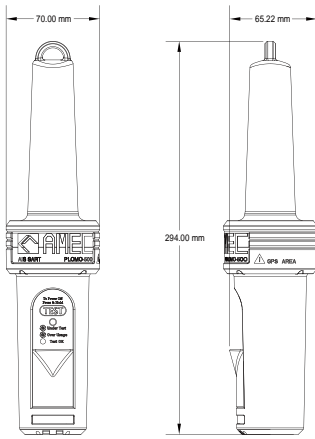

INSTRUCTION DIAGRAM

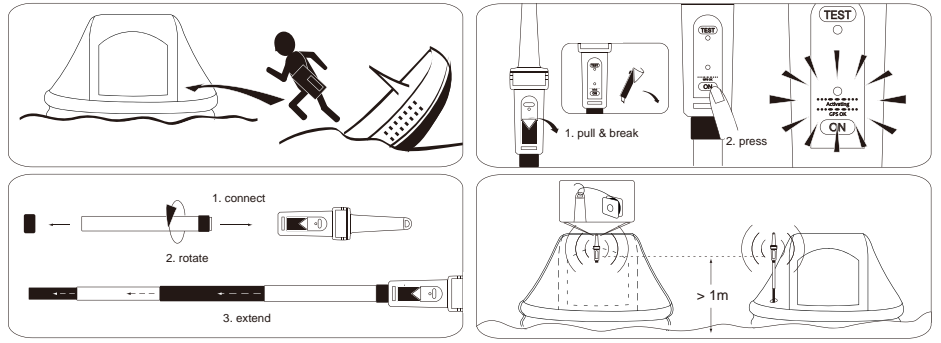

SPECIFICATIONS

▶ APPLICABLE STANDARDS

IEC 61097-14
IEC 60945
IEC 61108-1
ITU-R M.1371
MSC.246(83)

▶ CARRY & MOUNTING

Carry Bag
Wall Mount

▶ VHF TRANSMITTER

Operating Frequency AIS 1, 161.975MHz
AIS 2, 162.025MHz
Data Rate 9,600bps
Bandwidth 25 KHz
Power Output 1W EIRP
AIS Message Type Message 1, Message 14
Modulation GMSK
Antenna Integrated by PCB

▶ ENVIRONMENTAL

Operating Temperature -20°C~55°C
Storage Temperature -30°C~70°C
Waterproof Immersion to 10m
Buoyancy Floats
Exterior Finish Highly Visible Yellow
Compass Safe Distance Standard Magnetic - 0.6 m
Steering Magnetic - 0.4 m

▶ GPS RECEIVER

Receiving Channels 48 channels
Acquisition Sensitivity (-)159 dBm
Tracking Sensitivity (-)159 dBm
Position Accuracy < 2.5 m Autonomous & SBAS

▶ PHYSICAL

Max Diameter (Main Body) 70 mm (2.76 inch)
Length (Main Body) 300 mm (11.81 inch)
Weight (Main Body) 283 g (Battery included)
Length (Pole) 1050 mm (41.34 inch) (Extended)
Weight (Pole) 300 g
Weight (Storage Package) 1.08 kg

▶ BATTERY

Type Primary Lithium (not rechargeable)
Operating Life 96 hours minimum
Storage 5 years
Service Replaceable

Note: Specifications are subject to change without prior notice.



Alltek Marine Electronics Corporation

7F, No. 605, Rueli Guang Rd., Neihu, Taipei, Taiwan 114

Tel: +886-2-2627-1599 Fax: +886-2-2627-1600

www.alltekmarine.com

The AIS Specialists

Sales Contact

For more information, please contact your local representative or Alltek Marine at

sales@alltekmarine.com

Distributor/Dealer