


Connect wiring as below:

You need a second float switch, which must be mounted a little bit higher than the first one !

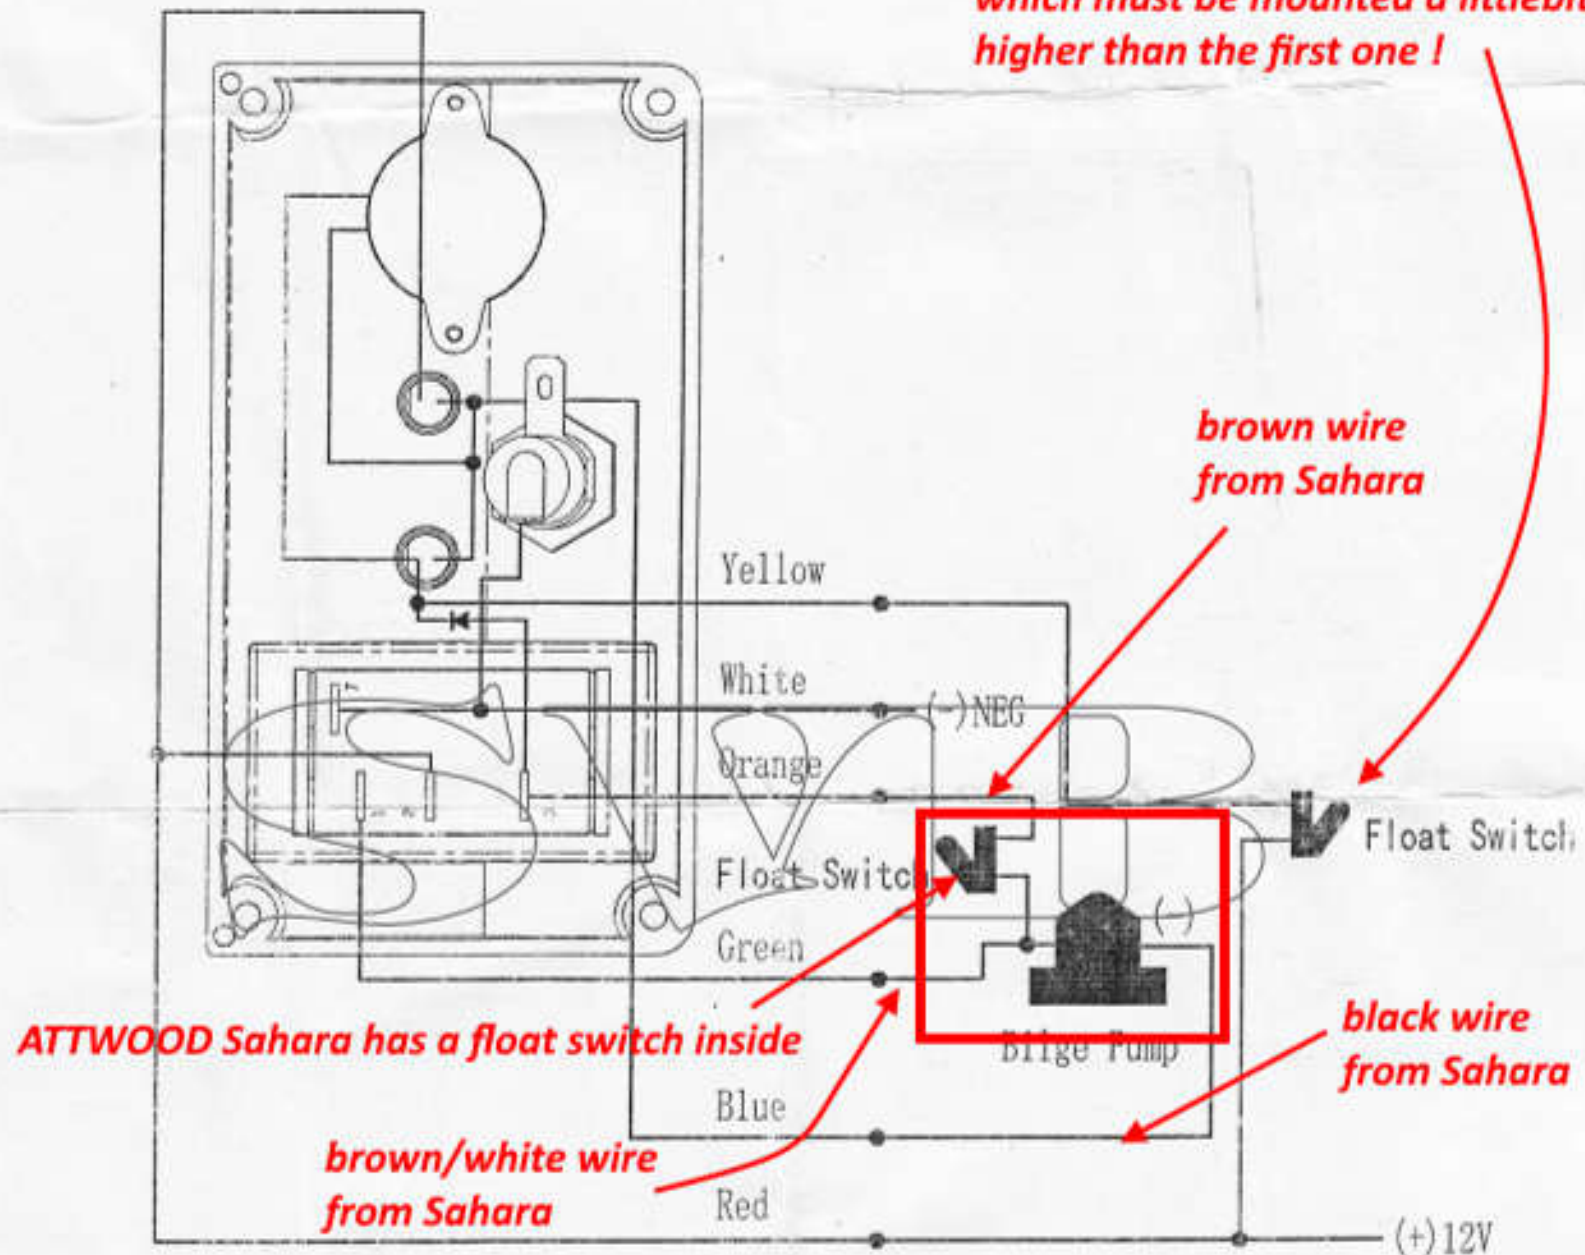

Use min. 16 AWG Cable / min. 1,5 mm² wire cross section