

### DeckHand Dimmer 6A

PN 7504

The illuminated exit setting allows boaters to safely disembark before the lights automatically turn off.

#### Features

- Digitally controls dimming of non-regulated LEDs, incandescent, and halogen lights
- Illuminated exit with adjustable time delay
- Supports multiple switch locations
- Memory for last dimmer setting
- Bulb saver prevents excessive bulb aging while boat's batteries are being charged
- Offset mounting tabs allow dimmers to be mounted close together
- Includes momentary (ON)-OFF-(ON) switch

#### Overcurrent Protection

DeckHand Dimmers have a built in overcurrent protection. If the unit stops working, correct the over current load, then hold the dimmer switch down until the circuit flashes.

#### Specifications

|                           |                             |
|---------------------------|-----------------------------|
| Nominal Voltage           | 24V DC                      |
| Operating Range           | 18V to 32V                  |
| Maximum Output Current    | 6A                          |
| Maximum Parasitic Current | <2mA                        |
| Temperature Range         | -40°C to 85°C               |
| Control Type              | Pulse With Modulation (PWM) |


#### Regulatory

CE marked. Meets ISO 8846 and SAE J1171 external ignition protection requirements

#### Using the illuminated exit mode

1 minute delay: Hold the switch in up position (bright) for 2 seconds, lights will flash. Release switch after first flash and the lights will remain on for 1 minute.

2-5 minute delay: Hold the switch in up position (bright) for 1-4 seconds after the first flash. Release the switch after 2 to 5 flashes. The lights will remain on for 1 minute for each flash up to a maximum of 5 minutes.

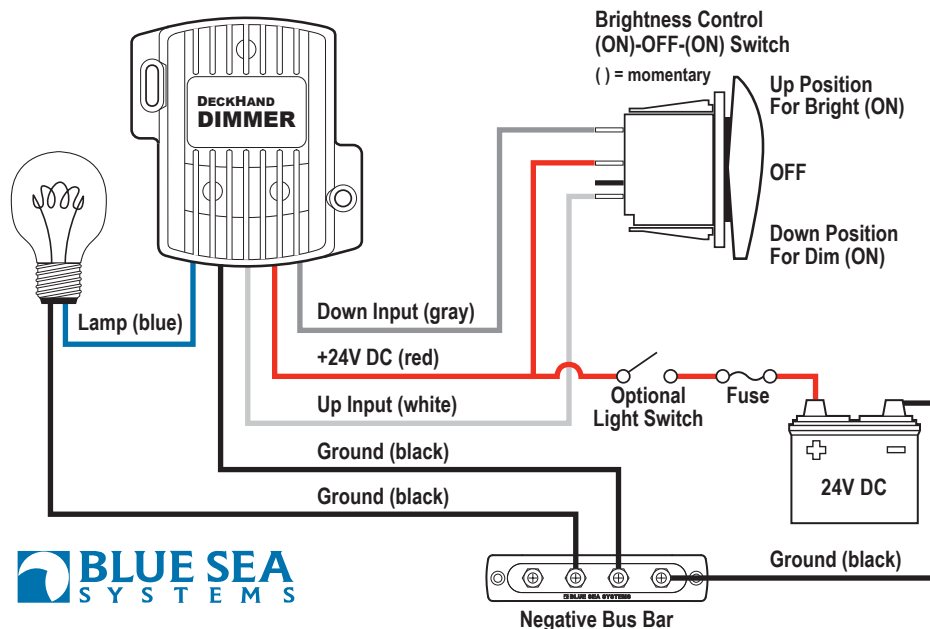

425 Sequoia Drive  
 Bellingham, WA 98226 USA  
 p 360.738.8230  
 p 800.222.7617 USA and Canada  
 f 360.734.4195  
 conductor@blueseas.com  
 www.blueseas.com